



# AOF

Τσιμούχα χωρίς ελατήριο, για δευτερεύουσα στεγανοποίηση και χαμηλή τριβή.

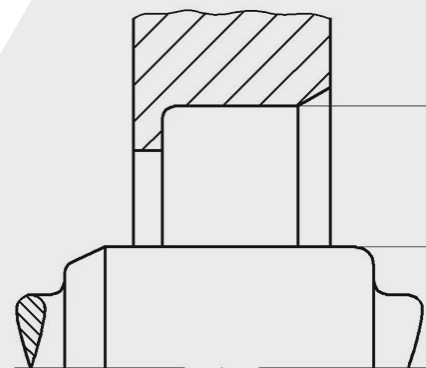

profile	product	type	description	materials	temp.*	temp.*	speed*	pressure*	range (mm)	
					[°C] min.	[°C] max.	[m/s] max.	[MPa] max.	from	to
	Oil seal	AOF	Ribbed Rubber OD Without Spring	NBR	-40	100	6	0	3	
				FKM (VITON) VMQ, ACM, EPDM, HNBR ...	-30	200	10	0	3	

\* The specified maximum values may not occur simultaneously.